

Withwave's Terminations are composed of broadband, due to the coaxial construction, It offers a performance specified from 0.69 to 2.8 GHz They come with two connectors, 4.3-10 (m) and 4.3-10 (f), a feature that allows for conveniently connecting and testing devices with different connector genders.

■ Features

- Power rating : 50 W
- Frequency : 0.69 to 2.8 GHz
- Dual connector : 4.3-10(M) & 4.3-10(F)
- Low PIM




■ Specification

Scope	Specification	TM20-09-09C
Electrical	Impedance(Ohm)	50
	Operation Freq. (GHz)	0.69 to 2.8
	VSWR (Max.)	1.37 : 1
	Peak Power	1kW
	Power rating	50 W
	PIM	<-160dBc @2x43dBm
Mechanical	Connector type	4.3-10(m) / 4.3-10(f)
	Body	Black anodized aluminum
	Weight	1.6 kg

■ Drawing

Unit : mm

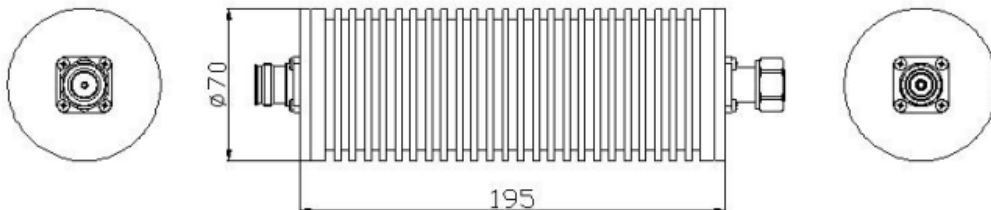

■ Test Result (Return Loss)

Freq: 500 MHz to 3 GHz

