

**Withwave's Low PIM Termination** is composed of broadband, due to the coaxial construction. It offers a performance specified from 0.69 to 2.8 GHz and **Low PIM performance (<160 dBc)**. They come with two connectors, **DIN 7/16 (M)** and **DIN 7/16 (F)**, a feature that allows for conveniently connecting and testing devices with different connector genders.

### ■ Features

- Low PIM (<160 dBc@ 2x20 W)
- Power rating : 10 Watt
- Frequency : 0.69 to 2.8 GHz
- Interface : 7/16 DIN(M) & 7/16 DIN(F)



### ■ Specification

Scope	Specification	TM21-04-09H
Electrical	Impedance(Ohm)	50
	Operation Freq. (GHz)	0.69 to 2.8
	VSWR (Max.)	1.37 : 1
	Peak Power	0.5kW
	Power rating	10 W
	PIM	<-160dBc @2x20W
	Connector type	7/16 DIN(M) / 7/16 DIN(F)
Mechanical	Outer Body	Alumina / Black
	Weight	0.6 kg


### ■ Drawing

Unit : mm



## ■ Test Result (Return Loss)

Freq: 10 MHz to 3 GHz

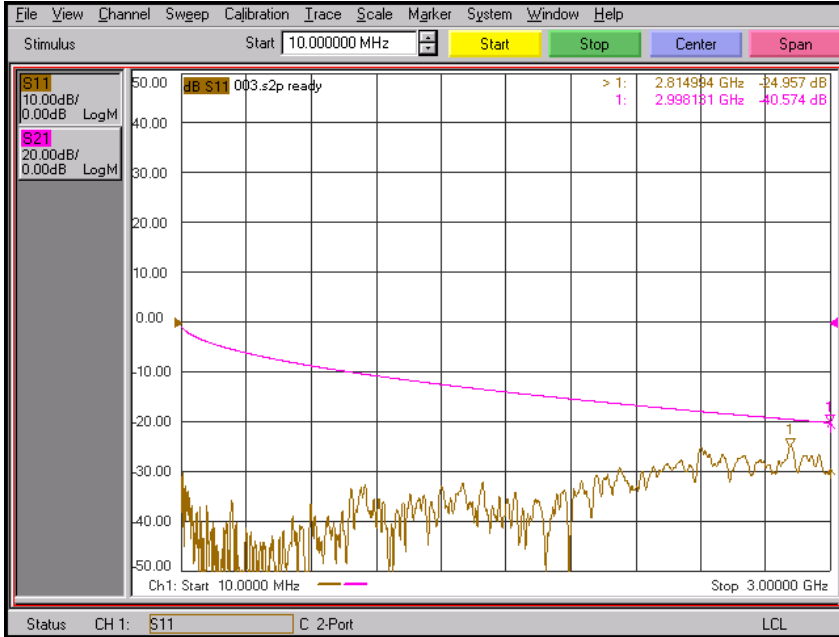

## ■ Test Result (PIM Test)

Freq: 1805 MHz to 1880 MHz, IM3, 1730 MHz (@43 dBm(20W))

