

Precision Test Adapters

2.92 mm(M) to 2.92 mm(F) : Bulkhead type

withwave

Versatile RF & MW Test Solutions

Withwave's Precision Test Adapters are designed based on precision microwave interconnection technologies. This 2.92 mm(M) to 2.92 mm(F) adapter with bulkhead is manufactured to precise microwave specifications and constructed with male gender on side 1 and female gender side 2.

The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz



■ Features

- Frequency range : DC to 40 GHz
- VSWR : 1.30 : 1(Max) @ 40 GHz
- Stainless steel (passivated)

■ Specification

Scope	Specification	AD03M03FS2
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 40 GHz
	VSWR (Max)	1.30: 1
	Dielectric	Special dielectric
Material	Center Contact	BeCu with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-65 to +165 °C

* RoHS Compliant


Precision Test Adapters

2.92 mm(M) to 2.92 mm(F) : Bulkhead type

■ Drawing

Part No.: AD03M03FS2

Unit : mm

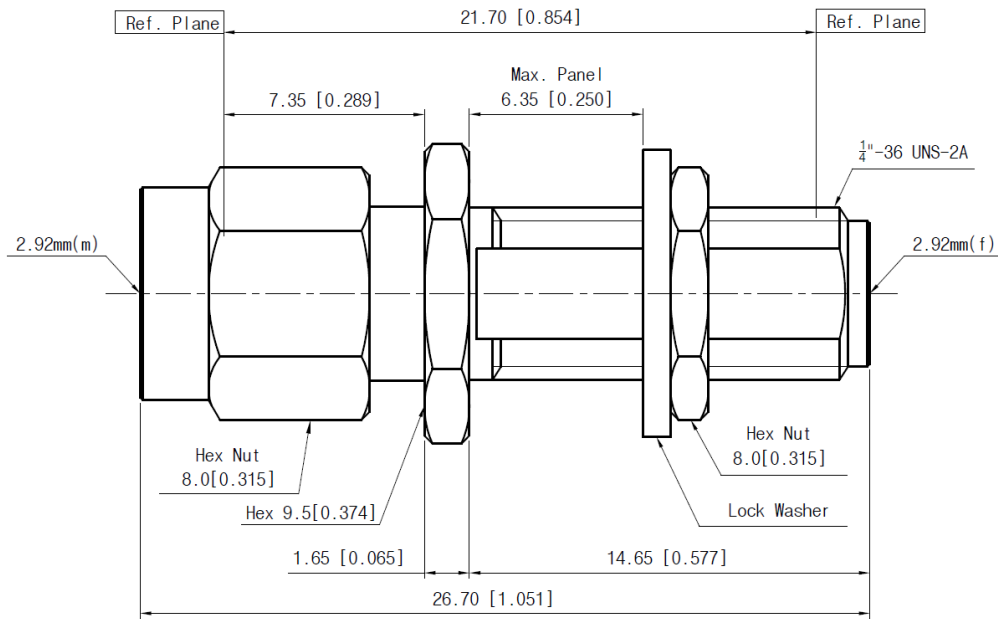

■ Test Result

