

Withwave's Precision Test Adapters are designed based on precision microwave interconnection technologies. **This SMP(Female) to 2.92mm(Male)** adapter is manufactured to precise microwave specifications and constructed with female gender on side 1 and male gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 40 GHz.



■ Features

- Frequency range : DC to 40 GHz
- VSWR(Max) : 1.20 : 1 (Max) @ 40 GHz
- Beryllium copper(gold plated) & Stainless steel(passivated)

■ Specification


Scope	Specification	AD05F03MS1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 40 GHz
	VSWR (Max)	1.20 : 1 @ 40 GHz
Material	Dielectric	Special dielectric / ULTEM
	Center Contact	Beryllium copper with gold plated
	Body	Beryllium copper with gold plated & Passivated stainless steel
	Operating Temperature	-65 to +165 °C

* RoHS Compliant

Drawing

Part No.: AD05F03MS1

Unit : mm

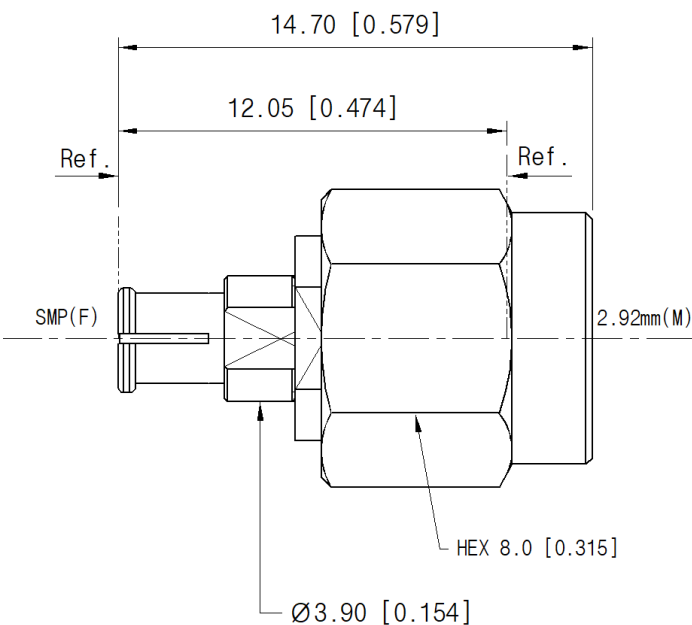

Test Result

Frequency : 10 MHz to 40 GHz

