

## 1.85 mm(M) to 2.4 mm(M) : Right Angle type

**Withwave's Precision Test Adapters** are designed based on precision microwave interconnection technologies. This 1.85 mm(M) to 2.4 mm(M) **Right Angle adapter** is manufactured to precise microwave specifications and constructed with male gender on both side.

The precision microwave connector interfaces ensure an excellent microwave performance up to 50 GHz



### ■ Features

- Frequency range : DC to 50 GHz
- VSWR(Max) : 1.30 : 1
- Body : Stainless steel (passivated)

### ■ Specification

Scope	Specification	AD01M02MR1
Electrical	Impedance(Ohm)	50
	Operation Freq.(GHz)	DC to 50 GHz
	VSWR (Max)	1.30 : 1
Material	Dielectric	PTFE
	Center Contact	Brass with gold plated
	Body	Passivated Stainless Steel
	Operating Temperature	-65 to +165 °C


\* RoHS Compliant

## 1.85 mm(M) to 2.4 mm(M) : Right Angle type

### ■ Drawing

Part No.: AD01M02MR1

Unit : mm[inch]

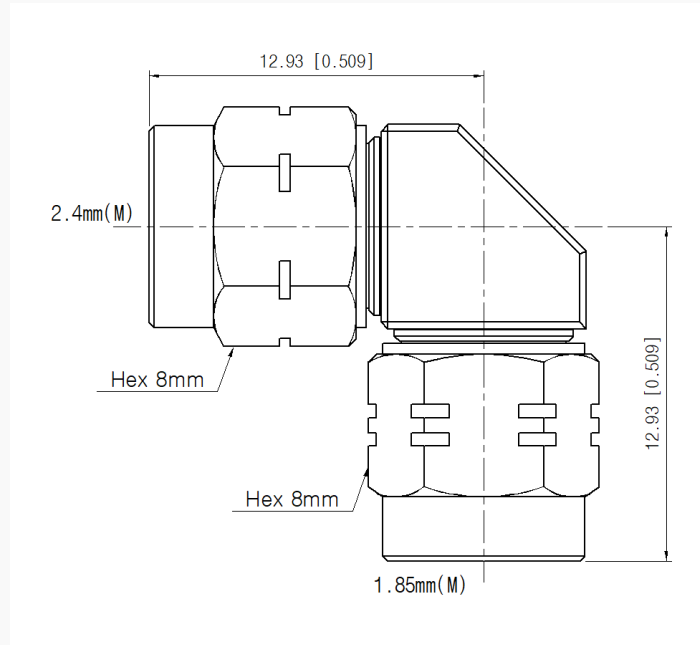

### ■ Test Result

▪ Frequency : 10 MHz to 50 GHz

