

Withwave's Precision Test Adapters are designed based on precision microwave interconnection technologies. This SMA(M) to SMA(M) adapter is manufactured to precise microwave specifications and constructed with male gender on side 1 and male gender side 2. The precision microwave connector interfaces ensure an excellent microwave performance up to 18 GHz



■ Features

- Frequency range : DC to 18 GHz
- VSWR(Max) : 1.20 : 1
- Stainless steel (passivated)

■ Specification


| Scope | Specification | AD06M06MS1 |
|------------|-----------------------|-------------------------------|
| Electrical | Impedance(Ohm) | 50 |
| | Operation Freq.(GHz) | DC to 18 GHz |
| | VSWR (Max) | 1.20 : 1 |
| Material | Dielectric | Special dielectric |
| | Center Contact | Brass with gold plated |
| | Body | Passivated Stainless Steel |
| | Operating Temperature | -65 to +165 °C |

* RoHS Compliant

■ Drawing

Part No.: AD06M06MS1

Unit : mm

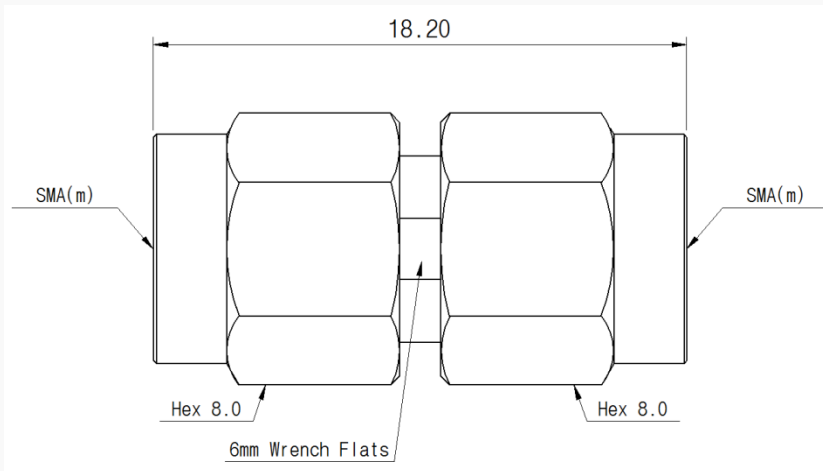

■ Test Result

