

Withwave's Terminations are composed of broadband, due to the coaxial construction, It offers a performance specified from 0.69 to 2.8 GHz They come with two connectors, DIN 7/16 (m) and DIN 7/16 (f), a feature that allows for conveniently connecting and testing devices with different connector genders.

■ Features

- Power rating : 10 W
- Frequency : 0.69 to 2.8 GHz
- Dual connector : 7/16 DIN(M) & 7/16 DIN(F)
- Low PIM




■ Specification

Scope	Specification	TM21-04-09
Electrical	Impedance(Ohm)	50
	Operation Freq. (GHz)	0.69 to 2.8
	VSWR (Max.)	1.37 : 1
	Peak Power	0.5kW
	Power rating	10 W
	PIM	<-160dBc @2x5W
Mechanical	Connector type	7/16 DIN(m) / 7/16 DIN(f)
	Outer Body	Alumina / Oxidation Blackening
	Weight	1.3 kg

■ Drawing

Unit : mm

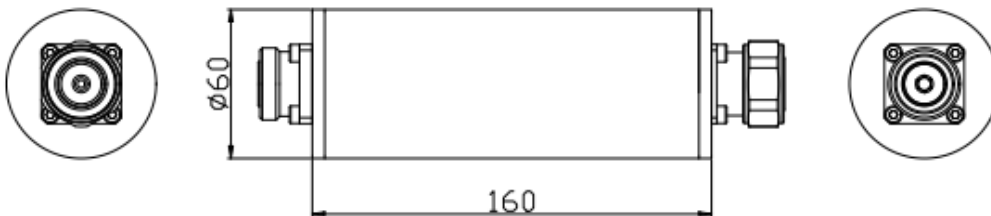

■ Test Result (Return Loss)

Freq: 500 MHz to 3 GHz

