

Withwave's Power Divider offer frequency range from 6 to 18 GHz and low insertion loss & VSWR.

This divider (PD60180-3-SF) is capable of handing C.W power up to 20 Watt (Max.)




■ Features

- 3 Way Type
- SMA Connector (Female)
- CW Power : 20 Watt (Max.)

■ Specification

Scope	Specification	PD60180-3-SF
Electrical	Impedance	50 Ohm
	Freq. range	6 to 18 GHz
	Insertion Loss(Max.)	1.0 dB
	Isolation	18 dB (min.)
	VSWR (Max.)	1.50 : 1
	Phase Imbalance (Max.)	± 6.0 dB
	Amplitude Imbalance (Max.)	± 0.6 dB
	Forward Power (Max.)	30 Watt
Mechanical	Peak Power (Max.)	300 Watt
	Port Connector	SMA (Female)
	Weight	51 g

■ Drawing

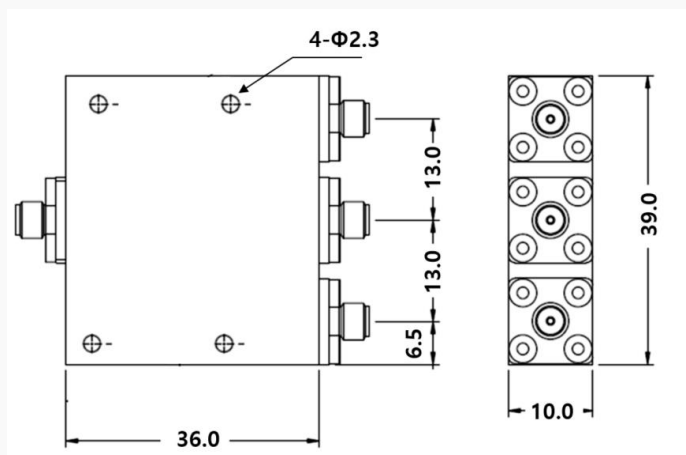

Unit : mm